

Solid State Broadband High Power Amplifier

1190- BBM4A5AN4
1000 – 2000 MHz / 230 Watts

The BBM4A5AN4 (SKU 1190) is suitable for multi octave broadband high power RF & MW applications. This compact module utilizes state-of-the-art high power GaN technology providing excellent power density, high efficiency, wide dynamic range and low distortions. Exceptional performance, long term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, machined housings and qualified components. Empower RF's ISO9001 Quality Assurance Program assures consistent performance and the highest reliability.



- Solid-state Class AB design
- Ultra-wide instantaneous bandwidth
- CW, AM and FM (Contact factory for other modulation types)
- 50 ohm input/output impedance
- Built-in control, monitoring and protection circuits
- Compact, lightweight, rugged and reliable

ELECTRICAL SPECIFICATIONS @ +28V_{DC}, 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	1000		2000	MHz
Output Power CW	P _{SAT}	230			Watt
Output Power @ 1dB Gain Compression	P _{1dB}		80		Watt
Small Signal Gain	G _{SS}	10	13		dB
Small Signal Gain Flatness	ΔG _{SS}			±1.0	dB
Input Power for Rated P _{SAT}	P _{IN}		+40		dBm
Gain Tracking @ G _{SS} (Module to Module)	ΔG _T			±0.75	dB
Phase Tracking @ G _{SS} (Module to Module)	ΔΦ _T			±10	Deg
Input Return Loss	S ₁₁			-10	dB
Third Order Intercept Point 2-Tone @ 40dBm/Tone, 100kHz Spacing	IP3	+55			dBm
Harmonics @ P _{OUT} = 230W	H	-12			dBc
Spurious Signals	Spur		-70	-60	dBc
Operating Voltage	V _{DD}	26	28	30	Volt
Current Consumption @ P _{OUT} = 230W CW	I _{DD}		20	22	Amp
Current Consumption @ Shutdown	I _{SD}			200	mA
Switching Time @ 1kHz TTL, P _{OUT} = 100W	T _{ON/OFF}			5	μSec

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Symbol	Min	Typ	Max	Unit
Operating Case Temperature	T _C	-20		+70	°C
Non-operating Temperature	T _{STG}	-40		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Altitude (MIL-STD-810F Method 500.4)	ALT			30,000	Feet
Vibration/Shock MIL-STD-810F – Method 514.5/516.4 – Proc 1	VI/SH		Airborne		

MECHANICAL SPECIFICATIONS

Parameter	Value	Unit
Dimensions	8.2 x 5.0 x 1.0	Inch
Weight	2.0	Pound
RF Connectors Input/Output	Input: Type-SMA, Female Output: Type-N, Female	
DC Interface Connector	Hybrid D-Sub 7-Pin, Male	
Cooling	External Heatsink (Not Supplied)	

Solid State Broadband High Power Amplifier

1190- BBM4A5AN4
1000 – 2000 MHz / 230 Watts


LIMITS

Input RF drive level without damage	+45dBm	Max
Load VSWR @ P _{OUT} = 100W	∞ @ all load phase & amplitude for duration of 1 minute 3:1 @ all load phase & amplitude continuous	-
Thermal Overload	85°C Degradation	-

DC INTERFACE CONNECTOR – Hybrid D-Sub 7-Pin, Male

Pin #	Description	Specification
A1	VDD	+26.0-30.0V _{DC}
A2	GND	Ground
1	N/C	No Connection
2	Current Sensor	Analog voltage relative to I _{DD} @ 25mV/100mA
3	Temp Sensor	Analog voltage relative to Module's Temperature @ 10mV/°C (e.g. 0.25V = 25°C)
4	N/C	No Connection
5	Fast Shutdown	Amplifier Disable: TTL Logic High (5V) (Internally Pulled-low)

OUTLINE DRAWING

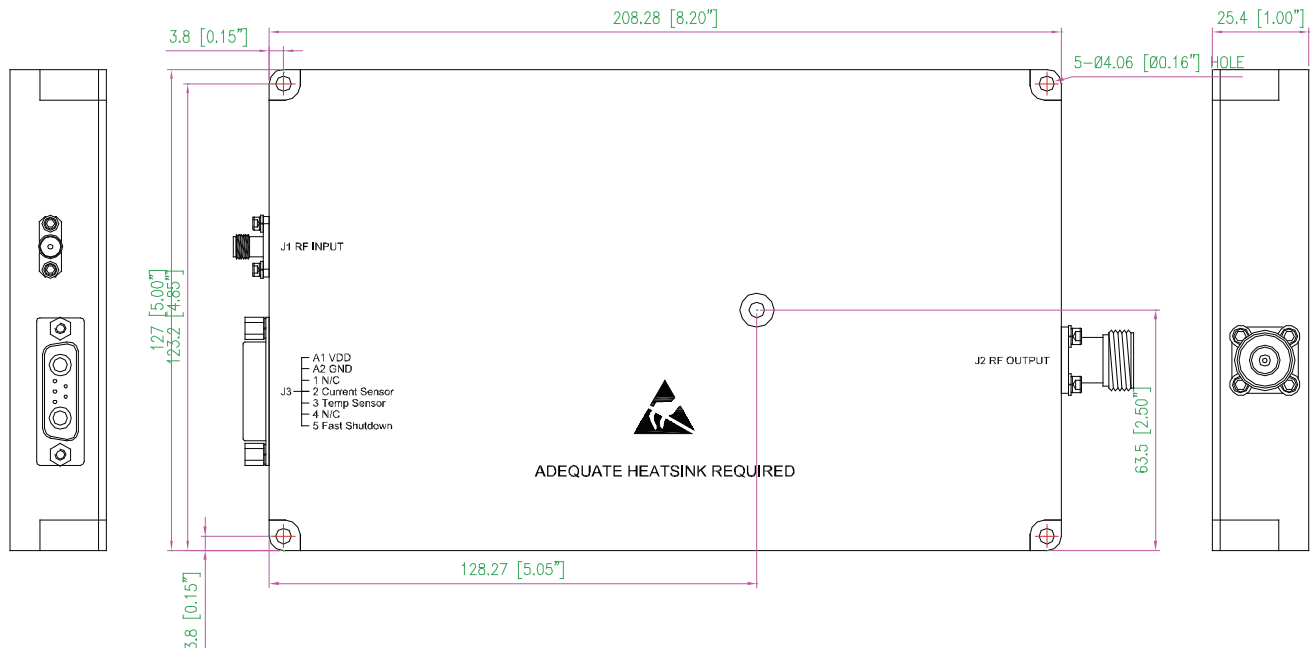

Solid State Broadband High Power Amplifier


1190-BBM4A5AN4

1000 – 2000 MHz / 230 Watts

PERFORMANCE PLOTS


Plot 1 – Small Signal Gain and Phase Response

Top Curve: Small Signal Gain @ $P_{IN} = 0\text{dBm}$
 Reference: 10dB, 1dB/div.
 Middle Curve: Phase Response
 Reference: 0deg, 10deg/div, Electrical Delay 2.64nsec.
 Bottom Curve: Input Return Loss
 Reference: 10dB, 10dB/div.

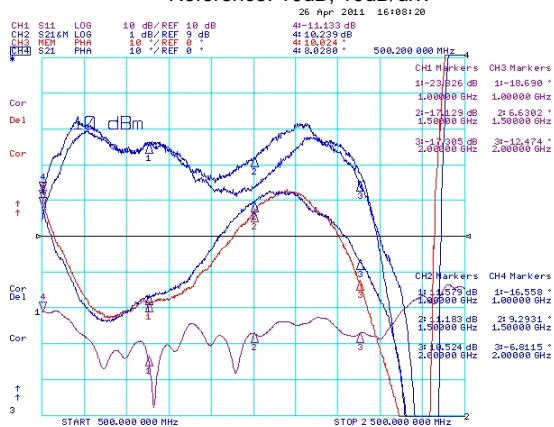


Plot 2 – Driver Small Signal Gain and P_{SAT}

Top Curve: Small Signal Gain @ $P_{IN} = -20\text{dBm}$
 Middle Curve: Power Gain @ P_{SAT} , $P_{IN} = 0\text{dBm}$
 Reference; 47dB, 1dB/div
 Bottom Curve: Input Return Loss
 Reference: 10dB, 10dB/div

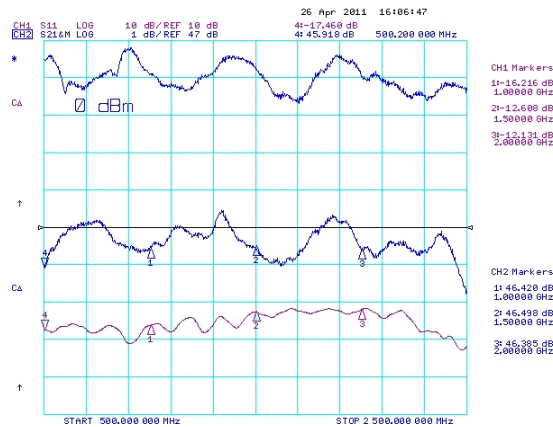

Plot 3 – Small Signal Gain and P_{1dB} with Driver

Top Curve: Small Signal Gain @ $P_{IN} = -20\text{dBm}$
 Middle Curve: Power Gain @ P_{1dB} , $P_{IN} = -14\text{dBm}$,
 Reference: 60dB, 1dB/div
 Bottom Curve: Input Return Loss of Driver
 Reference: 10dB, 10dB/div

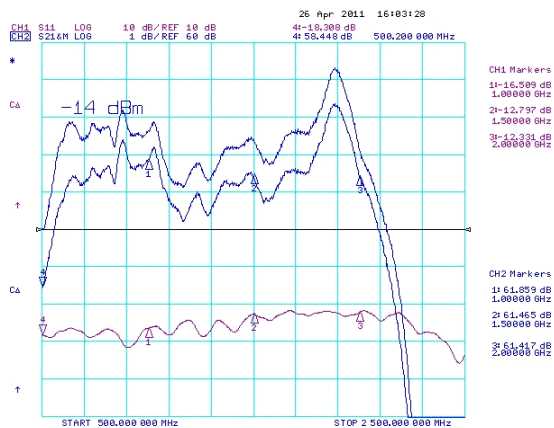

Plot 4 – Small Signal Gain and P_{SAT} with Driver

Top Curve: Small Signal Gain @ $P_{IN} = -20\text{dBm}$
 Middle Curve: Power Gain @ P_{SAT} , $P_{IN} = -3\text{dBm}$,
 Reference: 59dB, 1dB/div
 Bottom Curve: Input Return Loss of Driver
 Reference: 10dB, 10dB/div

