


Solid State Broadband High Power Amplifier

1094 - BBM2E3KKO

20 – 520 MHz / 100 Watts

The BBM2E3KKO (SKU 1094) is suitable for VHF & UHF broadband and band specific high power linear applications. This amplifier utilizes push-pull LDMOS power devices that provide high gain, wide dynamic range, low distortions, and good linearity. Exceptional performance, long term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, machined housings and qualified components. Empower RF's ISO9001 Quality Assurance Program assures consistent performance and the highest reliability.

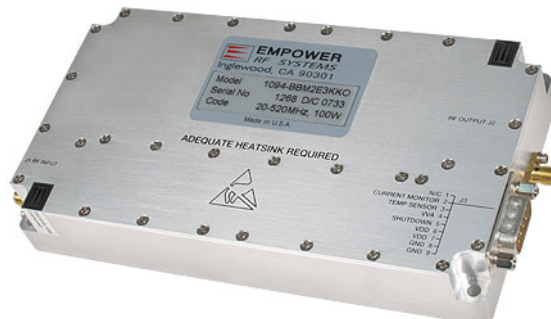

RoHS Compliant available
SKU# 1094-0001

- Solid-state Class AB design
- Instantaneous ultra broadband
- Small and lightweight
- Built-in Protection, Control & Monitoring Circuits
- Suitable for CW, AM, and FM (Consult factory for other modulation type)
- 50 ohm input/output impedance
- High reliability, ruggedness, and High Efficiency

ELECTRICAL SPECIFICATIONS @ +28V_{DC}, 25°C, 50 Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	20		520	MHz
Output Power CW	P _{SAT}	100	120		Watt
Output Power @ 1dB Gain Compression	P _{1dB}		60		Watt
Power Gain @ 1dB Gain Compression	G _{1dB}	50			dB
Input Power for Rated P _{OUT}	P _{IN}		0		dBm
Small Signal Gain Flatness	ΔG		±1.0	±1.5	dB
Gain Adjustment Range	VVA	25	30		dB
Input Return Loss	S ₁₁			-10	dB
Noise Figure @ max. gain	NF		7	10	dB
Third Order Intercept Point 2-Tone @ 37dBm/Tone, 100kHz Spacing	IP3		+56		dBm
Harmonics @ P _{OUT} = 100W	2 nd		-40		dBc
	3 rd		-15		
Spurious Signals	Spur		-70	-60	dBc
Operating Voltage	V _{DC}	26	28	30	Volt
Current Consumption @ 100 W	I _{DD}		8.0	8.5	Amp
Switching Time @ 10kHz TTL, 50% Duty Cycle	T _{ON/OFF}		1.0		uSec

MECHANICAL SPECIFICATIONS

Parameter	Value	Unit
Dimension	6.4 x 3.4 x 1.1	Inch
Weight	1.0	Pound
RF Connectors Input/Output	Type-SMA, Female	
DC Interface Connector	D-Sub 9-Pin, Male	
Cooling	External Heatsink (not supplied)	

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Symbol	Min	Typ	Max	Unit
Operating Case Temperature	T _C	-40		+85	°C
Non-operating Temperature	T _{STG}	-40		+85	°C
Relative Humidity (non-Condensing)	RH			95	%
Altitude (MIL-STD-810F Method 500.4)	ALT			30,000	Feet
Vibration/Shock MIL-STD-810F Method 514.5/516.5 – Proc 1	VI/SH		Airborne		

Solid State Broadband High Power Amplifier

1094 - BBM2E3KKO

20 – 520 MHz / 100 Watts


SURVIVABILITY

Input RF drive level without damage	P_{OD}	+10 dBm	Max
Load VSWR @ $P_{OUT} = 60W$	Ψ	∞ @ all load phase & amplitude	1 minute
Load VSWR @ $P_{OUT} = 60W$	Ψ	3:1 @ all load phase & amplitude continuous	-
Thermal Overload	T_{OL}	60°C graceful degradation @ 85°C the power gain will not drop more than 3dB	Max

INTERFACE CONNECTOR - D-Sub, 9-Pin

Pin #	Description	Specification
1	N/C	No Connection
2	Current Monitor	Analog voltage relative to I_{DD} @ 50mV/100 mA
3	Temp Sensor	Analog voltage relative to Module's Temperature @ 10mV/°C
4	VVA	Control voltage range, 0-5V _{DC} Maximum Gain = 0V _{DC} , Minimum Gain = 5V _{DC}
5	Shutdown	Amplifier Disable: TTL Logic High (Internally Pulled-Low)
6&7	VDD	+26.0-30.0V _{DC}
8&9	GND	Ground

OUTLINE DRAWING

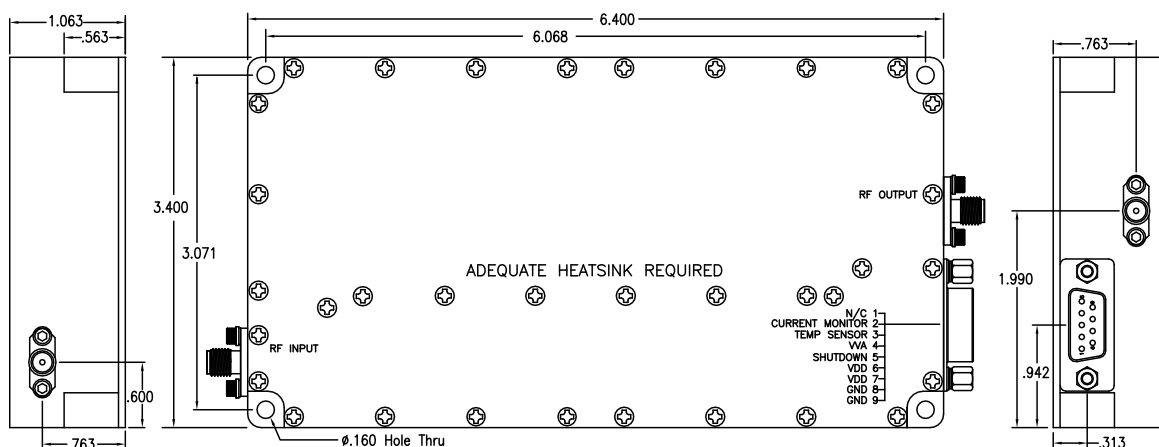

Features:

- Built-in gain adjust VVA
- Fast switching - Mute function
- Reverse polarity protection
- Temperature protection
- Temperature indication
- Current limit protection
- Current consumption indicator

Solid State Broadband High Power Amplifier


1094 - BBM2E3KKO

20 – 520 MHz / 100 Watts

TYPICAL PERFORMANCE PLOTS


Plot 1 – Small Signal Gain and P_{1dB}

Top Curve: Small Signal Gain @ $P_{IN} = -20dBm$
 Middle Curve: Power Gain @ P_{1dB} , $P_{IN} = -3.4dBm$
 Reference: 50dB, 1dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/div.

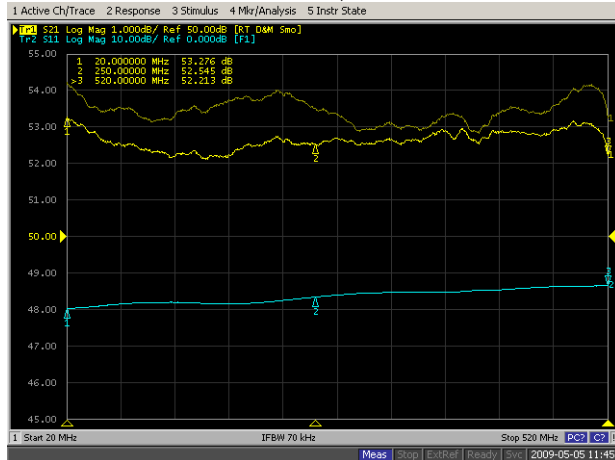

Plot 2 – Small Signal Gain and P_{SAT}

Top Curve: Small Signal Gain @ $P_{IN} = -20dBm$
 Middle Curve: Power Gain @ P_{SAT} , $P_{IN} = 2dBm$
 Reference: 50dB, 1dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/div.

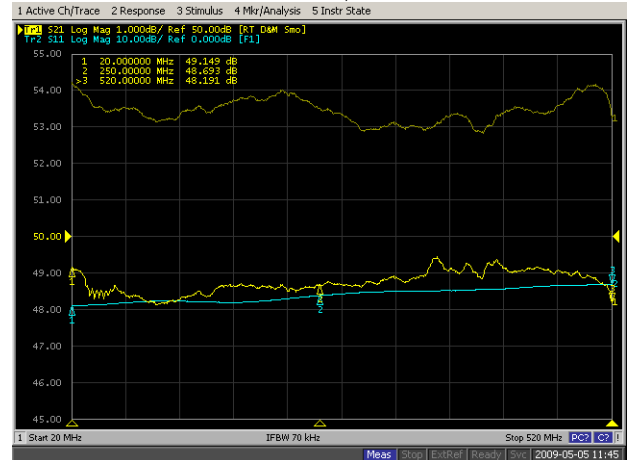

Plot 3 – Gain Adjustment Range @ $P_{IN} = -20dBm$

Top curve: Maximum Gain, $V_{VACtrl} = 0V$
 Middle curve: Minimum Gain, $V_{VACtrl} = 5V$
 Reference: 20dB, 10dB/div.
 Bottom Curve: Input Return Loss @ Minimum Gain
 Reference: 0dB, 10dB/div.

