


- PCB Mounting Type
- MIL, Industrial equipments.
- DC 28, 100V
- 10KHz~30MHz



MODEL NO	Rated Voltage	Rated Current	Line	Attenuation Characteristics (MIL-STD-220B)
BP2-M001D	28V DC	1A	2	10KHz : 25dB 100KHz : 53dB 1MHz~30MHz : 60dB
BP2-M005D		5A		10KHz : 20dB 100KHz : 47dB 1MHz~30MHz : 60dB
BP2-M010D		10A		10KHz : 15dB 100KHz : 45dB 1MHz~30MHz : 60dB
BP2-M001F	100V DC	1A		10KHz : 25dB 100KHz : 53dB 1MHz~30MHz : 60dB
BP2-M005F		5A		10KHz : 20dB 100KHz : 47dB 1MHz~30MHz : 60dB
BP2-M010F		10A		10KHz : 15dB 100KHz : 45dB 1MHz~30MHz : 60dB

Shapes & Dimensions

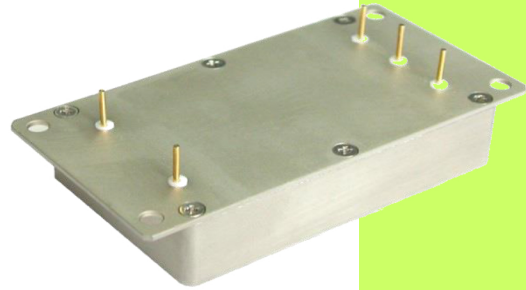