



AMP1046 SOLID STATE HIGH POWER AMPLIFIER



FEATURES

- Class AB GaN linear design
- Instantaneous wide bandwidth
- Suitable for all modulations standards
- Built-in protection circuits
- High reliability and ruggedness

ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	20 - 2500 MHz	
Power Output Psat	5 Watt Min	CW
Power Gain	37 dB Min	
Gain Flatness	4.0 dB p-p Max	
Gain Variation Over Temperature	±2.0 dB	Rated case temperature
Input Return Loss	10 dB Min	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	>30 dBc Typ	27dBm/Tone, Δ = 1MHz
Harmonics	>20 dBc Typ	At rated Pout
Non Harmonics Distortions	>60 dBc	
Operating Voltage	28 -30 VDC	
Current Consumption	1.25 Amp Max	At rated Pout
Max Input Power	+8 dBm	Without damage
Load VSWR Protection	∞ : 1	

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +75 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non Condensation

MECHANICAL SPECIFICATIONS


Parameter	Specification	Notes
Dimensions	125 X 63 X 27 mm	Without Connectors
Weight	300 gr.	Typical Weight
RF Connectors In/Out	SMA female	
DC Power / Interface Connector	9-Pin D-Sub	
Cooling	External Heatsink	Forced air required

D-SUB CONNECTOR PIN ASSIGNMENT

Pin	Function	Description
1	FWD	N/C
2	REV	N/C
3	CURRENT SENSOR	I _D @100mV/100mA Typ
4	TEMP SENSOR	V _T @10mV/°C + 500mV Typ
5	SHUTDOWN	TTL
6, 7	VDD	28VDC
8, 9	GND	Ground

AMP1046 SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING

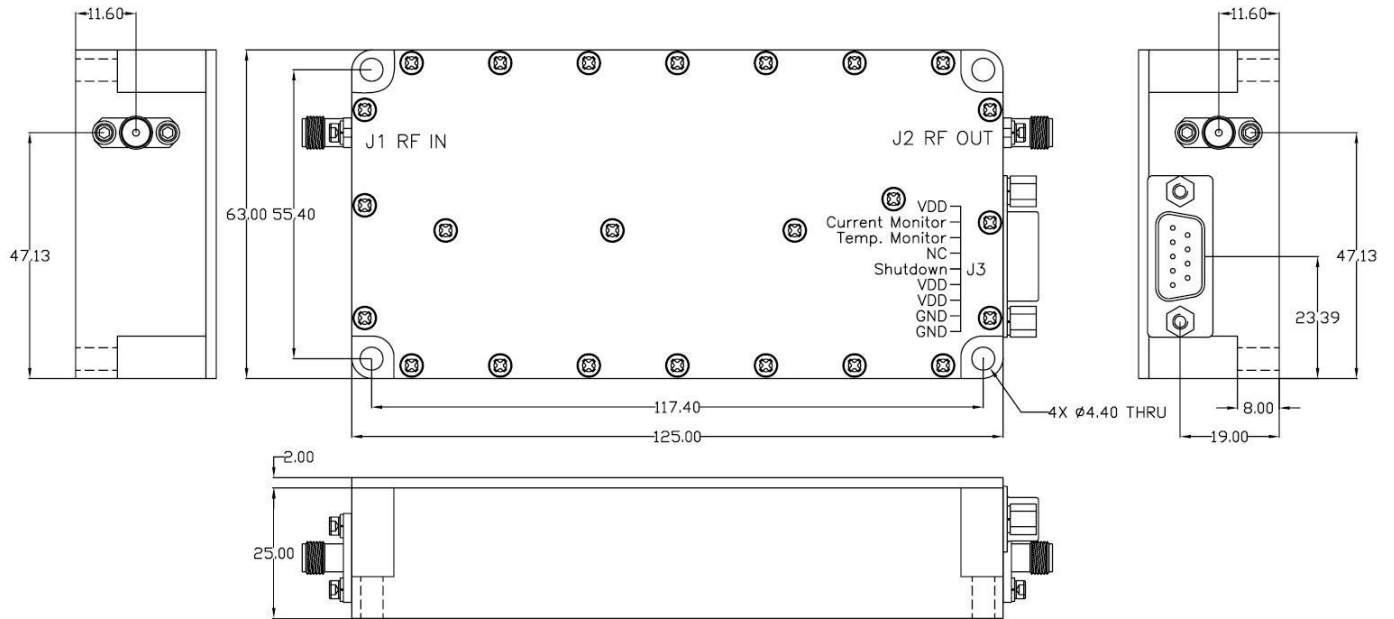

Note: S-Sub Pin 1-4 assignment may change