
PEARSON™ CURRENT MONITOR MODEL 7325

Sensitivity	0.01
Output resistance	50 C
Maximum peak current	50,0
Maximum rms current	400
Droop rate	3.0 %
Useable rise time	200
Current time product	22 A
Low frequency 3dB cut-off	5 Hz
High frequency 3dB cut-off	2 MF
l/f figure	140
Shielding	Dout
Output connector	UHF
Operating temperature	0 to
Weight	17.5

0.01 Volt/Ampere ±1% 50 Ohms 50,000 Amperes 400 Amperes 3.0 %/millisecond 200 nanoseconds 22 Ampere-second 5 Hz (approximate) 2 MHz (approximate) 140 peak Amperes/Hz Double UHF (SO-239) 0 to 65 °C 17.5 pounds

© 2013 Pearson Electronics, Inc. 7325.wpd 130816

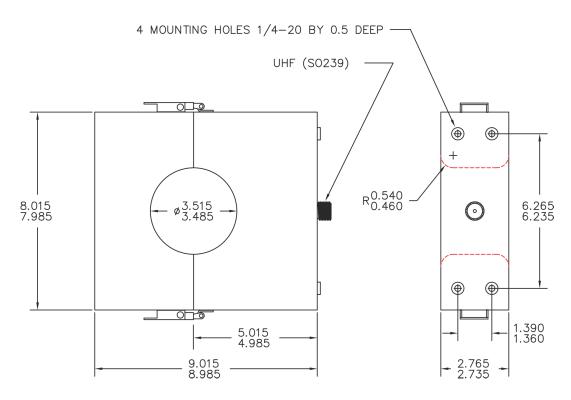

Distributed by: Reliant EMC LLC, 3311 Lewis Ave, Signal Hill CA 90755, 408-916-5750, www.reliantemc.com