


schematic for optoLAN-GB setup with accessories

Link capable of 10/100/1000MBit


important:

DUT needs to support auto negotiation to switch link to reduced speed or link has to be reprogrammed over integrated USB plug

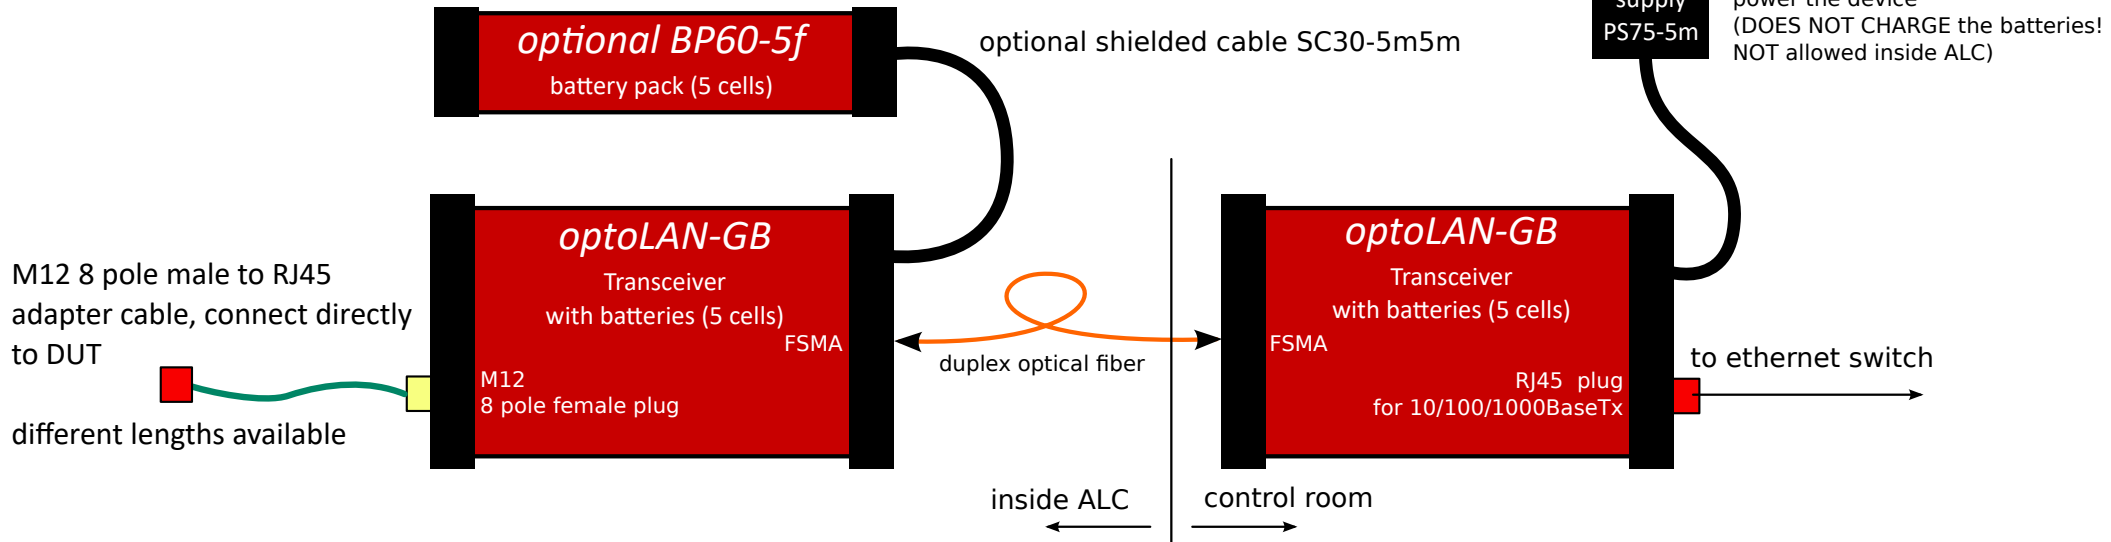

Battery charger CH/1-5m

100-240V input
4-10 cells charge output
to charge integrated batteries
of BPxxx-5f and
optical devices
NOT allowed during use
(DOES NOT power constantly!)

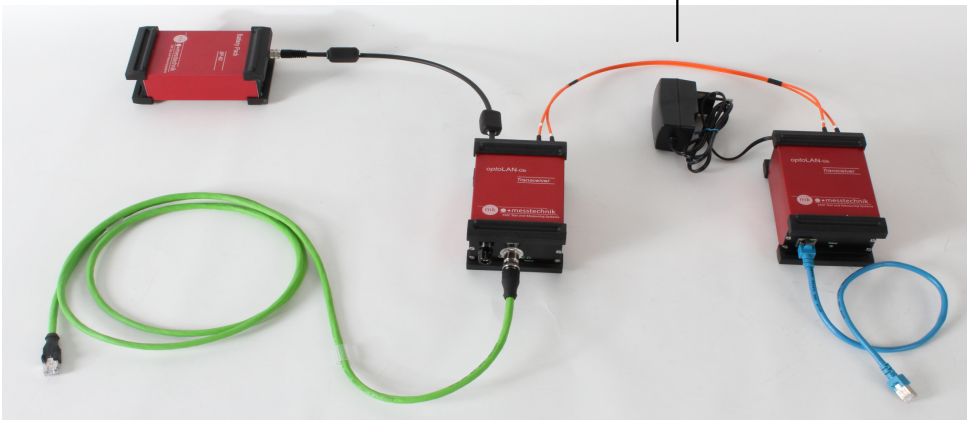

setup image

