WORLD'S FIRST 3D ANTENNA

ISOLOG 3D MOBILE

9 KHz TO 6 GHz

All-in-one antenna - No more swapping



Highlights:

- Compatible with any Spectrum Analyzer
- · High gain and low noise
- Built-in bypass pre-amplifiers (single or dual)
- · Manual or automatic axis switching





Gewerbegebiet Aaronia AG II, DE-54597 Strickscheid Tel.: +49(0)6556-9019-355 Fax: +49(0)6556-93034 www.aaronia.com E-Mail: mail@aaronia.de

MADE IN GERMANY



3D RF Testing at its Best



The new IsoLOG 3D Mobile, Aaronia's latest development, is an extremely light and small isotropic antenna compatible with any spectrum analyzer. Ready "on the fly", it offers a suitable plug and play solution for 3D measurements in limited time frames.

The antenna requires no software installation, no power connection and no changes to the hardware. Via the N (male or female) connector, it can be connected with any analyzer or oscilloscope.

The IsoLOG 3D Mobile is available in three different versions, with an ultra-wide frequency coverage from 9 kHz - 3 GHz (IsoLOG 3D Mobile 9030) or 9 kHz - 6 GHz (IsoLOG 3D Mobile 9060 and IsoLOG 3D Mobile PRO).



Hardware


Each IsoLOG 3D Mobile includes an internal, rechargeable battery (offering an operating time of approx. 6 hours), and switchable low-noise bypass single or dual pre-amplifiers.

The integrated amps allow the measuring of even extremely weak signals. Thus, used in bypass mode, the antenna is still usable amidst high field strengths. The antenna is controlled either via USB, or a manual antenna selection mode which requires no USB connection. The IsoLOG 3D Mobile also features a built-in, ultra-fast and adjustable "chopper" function: Using special, glitch-free RF switches, this feature offers an automatic endless antenna rotation / selection with a switching duration of up to 50 kHz. This transforms the IsoLOG 3D Mobile into a fully functional 3D antenna without the need for any USB software control.

Technical Data

Technical Specifications			
Design	Isotropic / 3D, portable		
Frequency Range	9 kHz to 3 GHz (9030)	9 kHz to 6 GHz (9060)	NEW! 9 kHz to 6 GHz (9060 PRO)
Preamp Stages	1	1	2
Chop / Switch Speed Rate	1 Hz to 50 kHz		
Nominal Impedance	50 Ohm		
RF Connection	N female (optional N male, SMA or BNC via adapter)		
Dimensions	315 x 70 x 70 mm		
Weight	350 g		
Tripod Connection	1/4"		
Battery	650 mAh LiPo		
Interface	USB 2.0		
Operating Temperature	-10° to +50°C		
Storage Temperature	-20° to +60°C		
Country of Origin	Germany		
Warranty	10 years		

Gain Diagram IsoLOG® Mobile Antennas

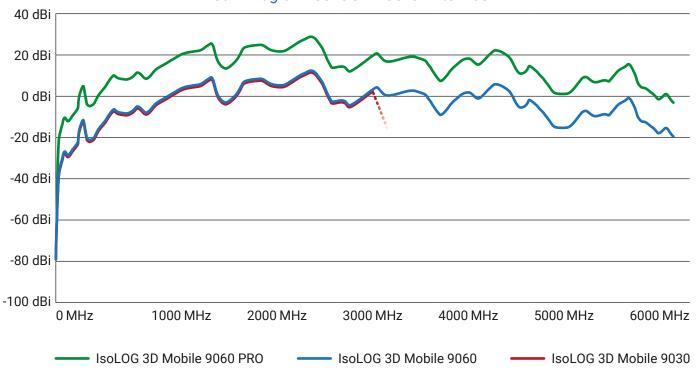

Functions and Accessories

Lightweight (only 350 g) and handy, the IsoLOG 3D Mobile is the ultimate portable measuring solution. The layout and functions are as follows:

- 1. Tri-Axis Sensor Head
- 2. LED Indicator Lights
- 3. Axis Change / Chop Mode
- 4. Manual / USB Control
- 5. Pre-Amp On / Bypass
- 6. Internal Sensor Change
- 7. Manual Chop Rate Selection
- 8. Antenna On / Off
- 9. 12 V Power Supply Connector
- 10. USB Connector
- **11.** RF Connector (N Female or N Male)



RF Connectors N Male and N Female

Included in Delivery

Shipped in a waterproof transport case, the scope of delivery leaves nothing to be desired:

- IsoLOG 3D Mobile antenna with built-in rechargeable battery
- Battery charger / power supply
- · Water and shock proof transport case
- Pistol grip with miniature tripod function
- SMA to N Adapter for the connection of SMA cables



REFERENCES

Selected List of Aaronia Clients



Government, Military, Aero- and Astronautic

- NATO, Belgium
- Department of Defense (DoD), USA
- Department of Defence, Australia
- · Airbus, Germany
- · Boeing, USA
- German Armed Forces, Germany
- · NASA, USA
- · Lockheed Martin, USA
- Lufthansa, Germany
- German Aerospace Center (DLR), Germany
- Eurocontrol, Belgium
- EADS, Germany
- Drug Enforcement Administration (DEA), USA
- Federal Bureau of Investigation (FBI), USA
- Federal Criminal Police Office (BKA), Germany
- Federal Police, Germany
- Ministry of Defence, Netherlands

Research/Development, Science and Universities

- MIT Physics Department, USA
- California State University, USA
- Indonesian Institute of Sience (LIPI), Indonesia
- · Los Alamos National Laboratory (LANL), USA
- · University of Bahrain, Bahrain
- University of Florida, USA
- University of Victoria, Canada
- University of Newcastle, United Kingdom
- · University of Durham, United Kingdom
- University Strasbourg, France
- University of Sydney, Australia
- University of Athen, Greece
- University of Munich, Germany
- Technical University of Hamburg, Germany
- Max-Planck Inst. for Radio Astronomy, Germany
- Max-Planck Inst. for Nuclear Physics, Germany
- Research Centre Karlsruhe, Germany

Industry

- · IBM, Switzerland
- Intel, Germany
- Shell Oil Company, USA
- ATI, USA
- · Microsoft, USA
- Motorola, Brazil
- Audi, Germany
- BMW, Germany
- · Daimler, Germany
- Volkswagen, Germany
- BASF, Germany
- · Siemens AG, Germany
- Rohde & Schwarz, Germany
- Infineon, Austria
- · Philips, Germany
- ThyssenKrupp, Germany
- EnBW (Energie Baden-Württemberg), Germany
- · CNN, USA
- Duracell, USA
- German Telekom, Germany
- · Bank of Canada, Canada
- NBC News, USA
- Sony, Germany
- Anritsu, Germany
- Hewlett-Packard, Germany
- · Bosch, Germany
- Mercedes-Benz, Austria
- Osram, Germany
- **DEKRA**, Germany
- AMD, Germany
- Keysight, China
- Infineon Technologies, Germany
- Philips Semiconductors, Germany
- Hyundai Europe, Germany
- · VIAVI, Korea
- Wilkinson Sword, Germany
- **IBM Deutschland,** Germany
- Nokia-Siemens Networks, Germany

