

AMP1014TC

SOLID STATE HIGH POWER AMPLIFIER



FEATURES

- Class AB linear LDMOS design
- Instantaneous wide bandwidth
- Suitable for all single channel modulation standards
- Built-in monitoring single channel and protection circuits
- High reliability and ruggedness

ELECTRICAL SPECIFICATIONS @ 28VDC

Parameter	Specification	Notes
Operating Frequency Range	20 - 520 MHz	
Power Output Psat CW	100 Watt Min	@28VDC
Power Gain	50 dB Min	
Power Gain Flatness	3.0 dB p-p Max	
Input Return Loss	10 dB Min	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	-30 dBc Typ	40dBm/Tone, $\Delta = 1\text{MHz}$
Harmonics	2nd <-35dBc Typ 3rd <-15dBc Typ	At rated Pout
Non-Harmonics Spurious	-60 dBc Max	
Operating Voltage	24 - 30 VDC Nom	28VDC Nom
Current Consumption	9 Amp Max	At rated Pout
Max Input Power Protection	+8 dBm	<10 Sec without damage
Load VSWR Protection	$\infty : 1$ Min	At rated Pout for 1 minute

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-30 to +75 °C	Extended Temp range
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non-condensing

MECHANICAL SPECIFICATIONS


Parameter	Specification	Notes
Dimensions	Option-00 - 162 x 96 x 27 mm Option-01 - 200 x 100 x 27 mm	Excluding Connectors
Weight	950 gr.	Max Weight
RF Connectors In/Out	SMA female	
DC Power / Interface Connector	9-Pin D-Sub	
Cooling	External Heatsink	Forced air required

D-SUB CONNECTOR PIN ASSIGNMENT


Pin	Function	Description
1	FWD	Option-101 - Analog Forward Power Indicator
2	VVA	Option-103 - Analog Gain Control
3	CURRENT SENSOR	$I_b@20\text{mV}/100\text{mA}$ Typ
4	TEMP SENSOR	$V_T@10\text{mV}/^\circ\text{C} + 500\text{mV}$ Typ
5	SHUTDOWN	TTL
6, 7	VDD	28VDC
8, 9	GND	Ground

AMP1014TC SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING - STANDARD

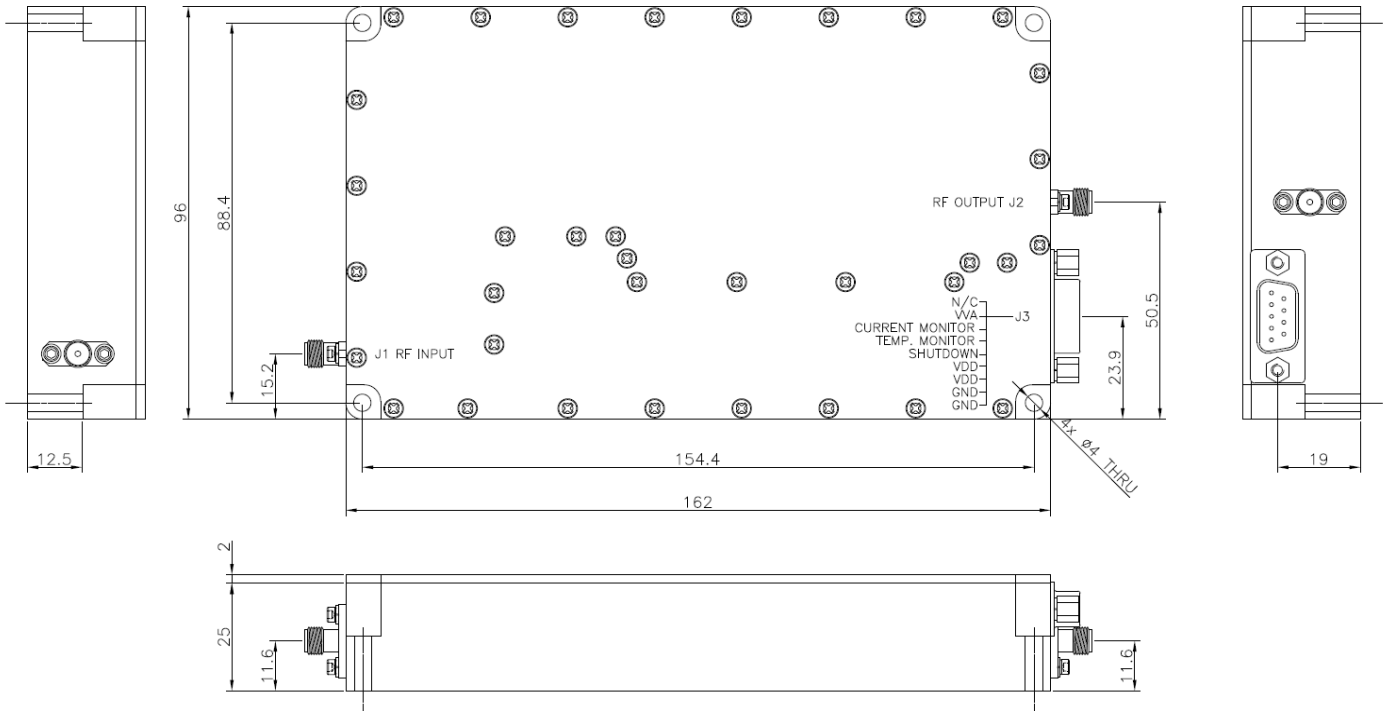

OUTLINE DRAWING - OPTION 101 & 103

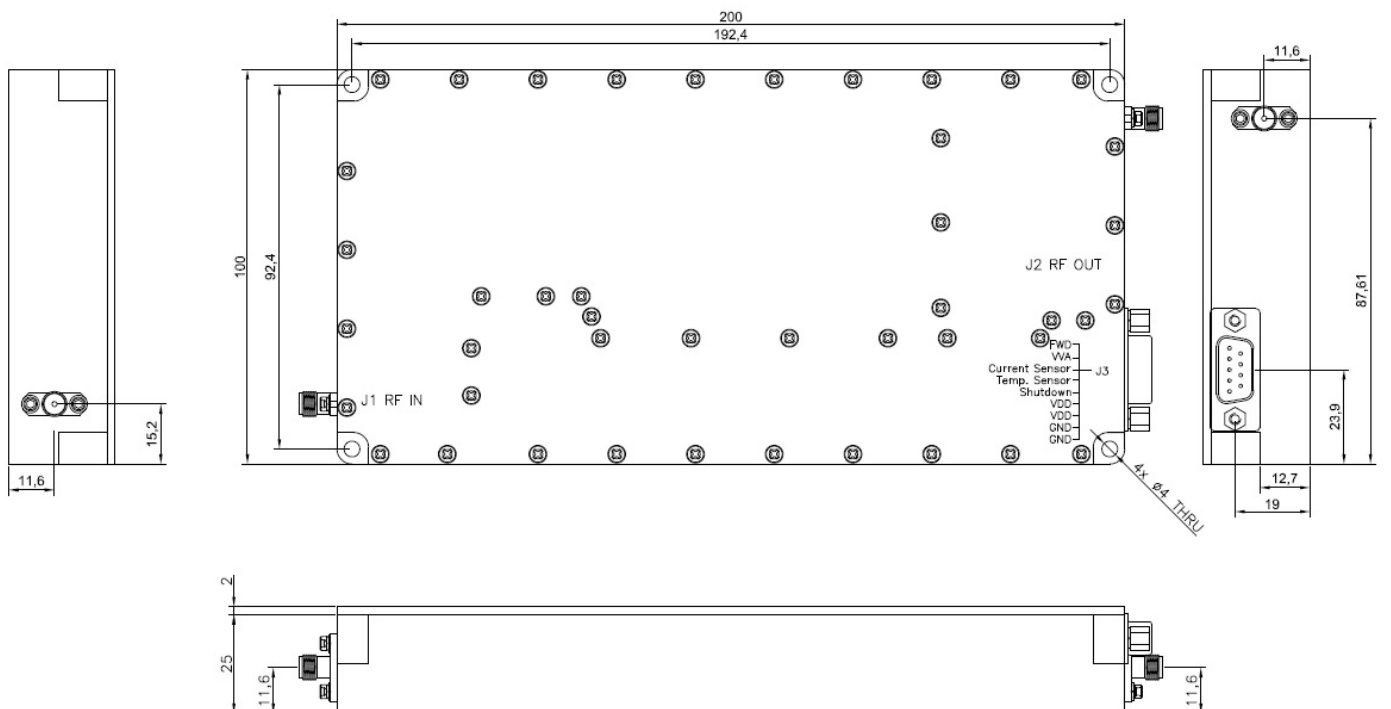



AMP1014TC SOLID STATE HIGH POWER AMPLIFIER

OPTION ORDERING INFORMATION:

OPTION	Function	Description
01	FWD	Forward power detect
03	VVA	Variable Voltage Attenuator