




MPA1114 SOLID STATE HIGH POWER AMPLIFIER

FEATURES

- Class AB linear GaN design
- Instantaneous wide bandwidth
- Suitable for all single channel modulation standards
- Built-in protection circuits
- High reliability and ruggedness

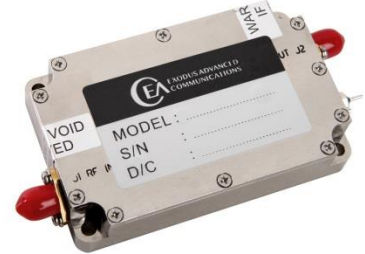

ELECTRICAL SPECIFICATIONS: 50Ω, 25°C

Parameter	Specification	Notes
Operating Frequency Range	100 - 2000 MHz	
Power Output Psat	2 Watt Min	CW
Power Gain	33 dB Min	
Power Gain Flatness	3.0 dB p-p Max	
Input Return Loss	-10 dB Max	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	-30 dBc Typ	23dBm/Tone, Δ = 1MHz
Harmonics 2 nd / 3 rd	-15 dBc Typ	At rated Pout
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	28 VDC Nom	
Current Consumption	1 Amp Max	At rated Pout
Input Power Protection	+8 dBm Max	<10 Sec without damage
Load VSWR Protection	∞ : 1	<1 minute @ rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +65 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non-condensing

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	80 x 60x 27 mm	Excluding connectors
Weight	150 gr.	
RF Connectors In/Out	SMA female	
DC Power / Interface Connector	Feed Thru	
Cooling	External Heatsink	

OUTLINE DRAWING

